

Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed March 21, 2014



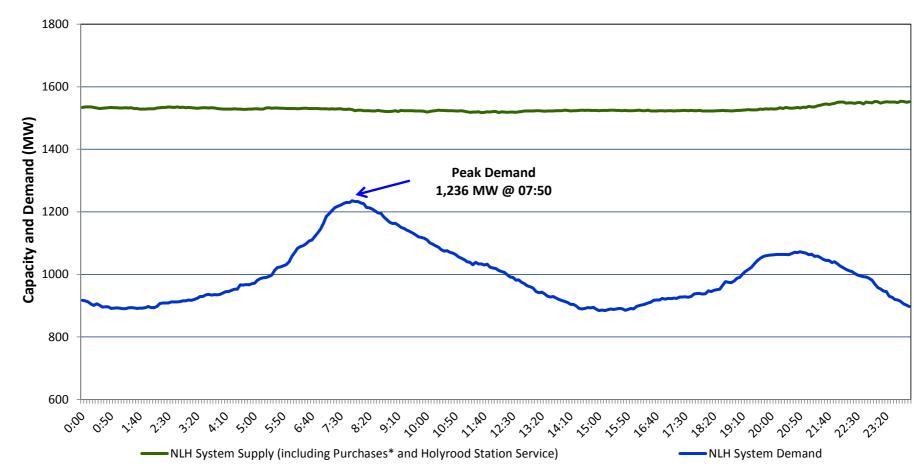

* Purchases include Nalcor Exploits, Star Lake, Rattle Brook, CBPP Co-Gen, Wind Generation, and CBP&P Curtailable Load

Supply Notes for March 20, 2014

- → As of 0422 hours, Feb. 17, 2014, Bay d'Espoir Unit 6 (77 MW) unavailable for service.
- → As of 0627 hours, March 17, 2014, Holyrood Unit 1 derated to 150 MW from 170 MW.
- As of 1910 hours, March 18, 2014, Hardwoods End B (25 MW) unavailable for service. Hardwoods derated to 25 MW from 50 MW.
- → As of 2203 hours, March 18, 2014, Bay d'Espoir Unit 4 (77 MW) unavailable for service.

Section 2 **NLH System Island Interconnected Supply and Demand** Temperature **NLH System Demand** March 21, 2014 NLH System Outlook³ (°C) (MW) Five-Day Forecast Evening Morning Evening Morning Available NLH System Supply:4 1,520 Friday, March 21, 2014 MW 1,150 1,025 °C -2 -3 Saturday, March 22, 2014 Current St. John's Temperature: 1,125 1,125 °C Sunday, March 23, 2014 1,150 1,125 Current St. John's Windchill: -11 Monday, March 24, 2014 -6 1,250 1,200 NLH System Peak Demand Forecast: 1,150 MW Tuesday, March 25, 2014 1,300 1,275

Supply Notes for March 21, 2014³

→

- Notes: 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
 - 2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as underfrequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Underfrequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
 - 3. As of 0800 Hours
 - 4. Gross output including station service at Holyrood (24.5 MW) and improved hydraulic output due to water levels (35 MW). Includes Nalcor Exploits, Star Lake, Rattle Brook, CBPP Co-Gen, and CBPP Curtailable Load (60 MW). Excludes wind generation.

Section 3 Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak			
March 21, 2014	Forecast NLH System Island Interconnected Peak Demand		1,350 MW
March 20, 2014	Actual Total Island Peak Demand ²	7:40	1,413 MW
March 21, 2014	Forecast Total Island Peak Demand		1,425 MW

Notes: 1. NLH System Island Interconnected is supplied by generation owned by NLH as well as NLH Power Purchases as detailed in Section 1 above.

2. Total Island System Demand is supplied by NLH generation and NLH Power Purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper to meet their respective supply needs.