


**Newfoundland Labrador Hydro (NLH)  
Supply and Demand Status Report Filed June 06, 2014**

**Section 1  
NLH System Island Interconnected Supply and Demand  
Actual 24 Hour System Performance For June 05, 2014**

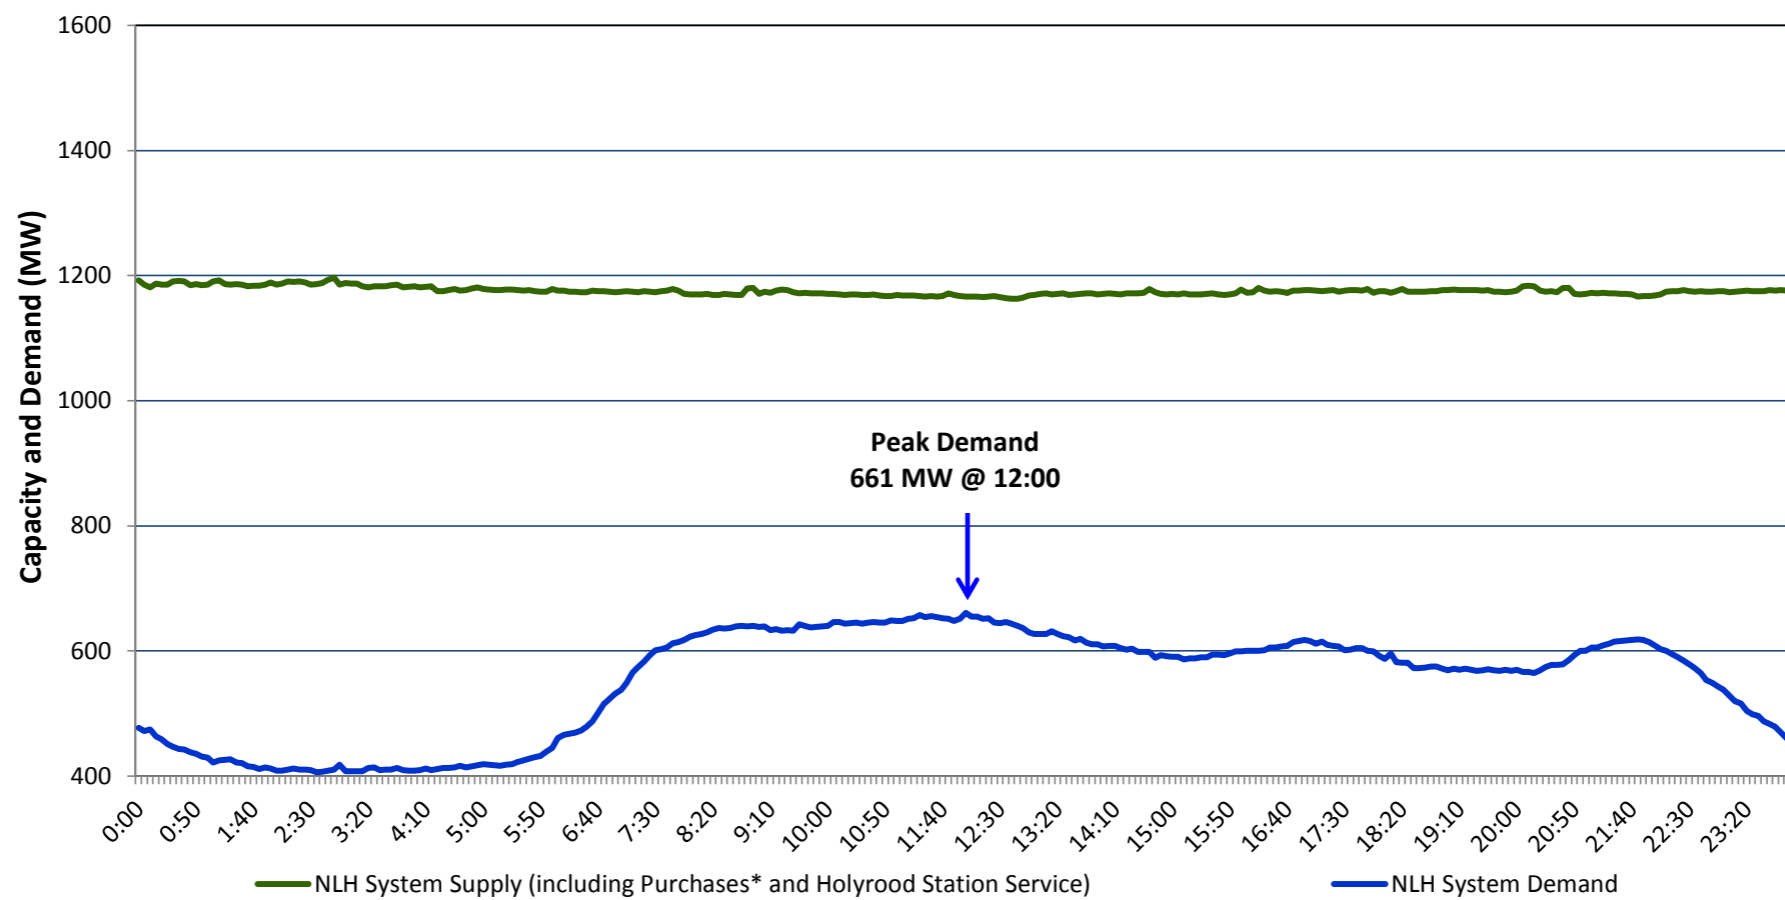

\* Purchases include Nalcor Exploits, Star Lake, Rattle Brook, CBPP Co-Gen, Wind Generation and DLP Secondary

**Supply Notes for June 05, 2014**

- As of 0422 hours, Feb. 17, 2014, Bay d'Espoir Unit 6 (77 MW) unavailable for service.
- As of 1717 hours, April 10, 2014, Holyrood Unit 3 removed from service for annual maintenance (150 MW).
- As of 0800 hours, May 21, 2014, Holyrood Unit 2 removed from service for annual maintenance (165 MW).
- As of 1554 hours, May 24, 2014, Bay d'Espoir Unit 3 removed from service for annual maintenance (76.5 MW).
- 

**Section 2  
NLH System Island Interconnected Supply and Demand**

June 6, 2014	NLH System Outlook <sup>3</sup>	Five-Day Forecast	Temperature (°C)		NLH System Demand (MW)	
			Morning	Evening	Morning	Evening
Available NLH System Supply: <sup>4</sup>	<b>1,160 MW</b>	Friday, June 06, 2014	11	14	<b>650</b>	<b>600</b>
Current St. John's Temperature:	12 °C	Saturday, June 07, 2014	11	11	675	675
Current St. John's Windchill:	N/A °C	Sunday, June 08, 2014	8	6	750	750
NLH System Peak Demand Forecast:	650 MW	Monday, June 09, 2014	5	5	750	725
		Tuesday, June 10, 2014	6	6	750	700

**Supply Notes for June 06, 2014<sup>3</sup>**

→

- Notes:
1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
  2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as underfrequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Underfrequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
  3. As of 0800 Hours.
  4. Gross output including station service at Holyrood (24.5 MW) and improved hydraulic output due to water levels (35 MW). Includes Nalcor Exploits, Star Lake, Rattle Brook, CBPP Co-Gen. Excludes wind generation and DLP Secondary.

**Section 3  
Peak Demand Information  
Previous Day Actual Peak and Current Day Forecast Peak**

June 5, 2014	Actual NLH System Island Interconnected Peak Demand <sup>1</sup>	12:00	661 MW
June 6, 2014	Forecast NLH System Island Interconnected Peak Demand		650 MW
June 5, 2014	Actual Total Island Peak Demand <sup>2</sup>	08:30	839 MW
June 6, 2014	Forecast Total Island Peak Demand		800 MW

- Notes:
1. NLH System Island Interconnected is supplied by generation owned by NLH as well as NLH Power Purchases as detailed in Section 1 above.
  2. Total Island System Demand is supplied by NLH generation and NLH Power Purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper to meet their respective supply needs.