
## Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed October 07, 2014

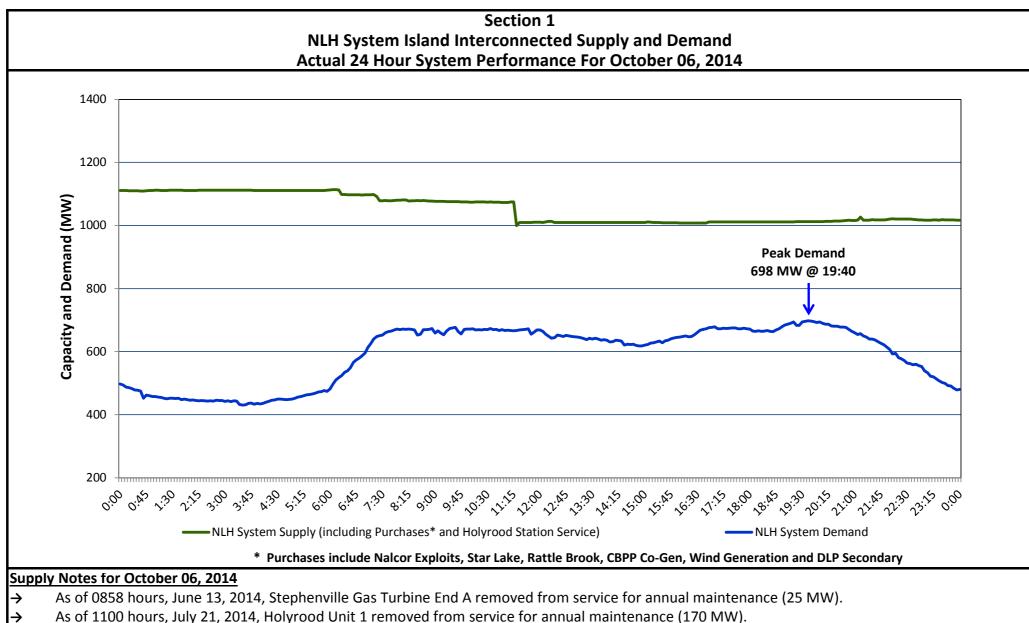

- → As of 1738 hours, August 27, 2014, Cat Arm Unit 1 derated to 53 MW (67 MW).
- → As of 1653 hours, September 25, 2014, Bay d'Espoir Unit 3 removed from service on a forced outage (76.5 MW).
- → As of 1734 hours, September 30, 2014, Holyrood Unit 3 load tested to 135 MW (150 MW).
- → As of 1906 hours, October 03, 2014, Holyrood Unit 2 removed from service. Previously derated to 141 MW (170 MW).
- As of 0826 hours, October 04, 2014, Stephenville Gas Turbine End B removed from service. Previously derated to 18 MW (25 MW).
- → At 0722 hours, October 06, 2014, Star Lake Unit removed from service for maintenance (18 MW).
- → At 1104 hours, October 06, 2014, Hinds Lake Unit removed from service for annual maintenance (75 MW).

Section 2 NLH System Island Interconnected Supply and Demand							
October 7, 2014 NLH System Outlook <sup>3</sup>			Five-Day Forecast	Temperature (°C)		NLH System Demand (MW)	
				Morning	Evening	Morning	Evening
Available NLH System Supply: <sup>4</sup>	1,015	MW	Tuesday, October 07, 2014	11	10	650	675
Current St. John's Temperature:	12	°C	Wednesday, October 08, 2014	7	9	700	725
Current St. John's Windchill:	N/A	°C	Thursday, October 09, 2014	11	14	675	725
NLH System Peak Demand Forecast:	675	MW	Friday, October 10, 2014	8	12	750	725
			Saturday, October 11, 2014	9	10	700	725

Supply Notes for October 07, 2014<sup>3</sup>

Notes: 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.

2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as underfrequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Underfrequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.

3. As of 0800 Hours.

4. Gross output including station service at Holyrood (24.5 MW) and improved hydraulic output due to water levels (35 MW). Includes Nalcor Exploits, Star Lake, Rattle Brook, CBPP Co-Gen. Excludes wind generation and DLP Secondary.

Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak						
October 6, 2014	Actual NLH System Island Interconnected Peak Demand <sup>1</sup>	19:40	698 MW			
October 7, 2014	Forecast NLH System Island Interconnected Peak Demand		675 MW			
October 6, 2014	Actual Total Island Peak Demand <sup>2</sup>	19:15	794 MW			
October 7, 2014	Forecast Total Island Peak Demand		800 MW			

Pulp & Paper to meet their respective supply needs.