


Newfoundland Labrador Hydro (NLH)
Supply and Demand Status Report Filed Thursday, May 07, 2015

Section 1
Island Interconnected System Supply and Demand
Actual 24 Hour System Performance For Wednesday, May 06, 2015

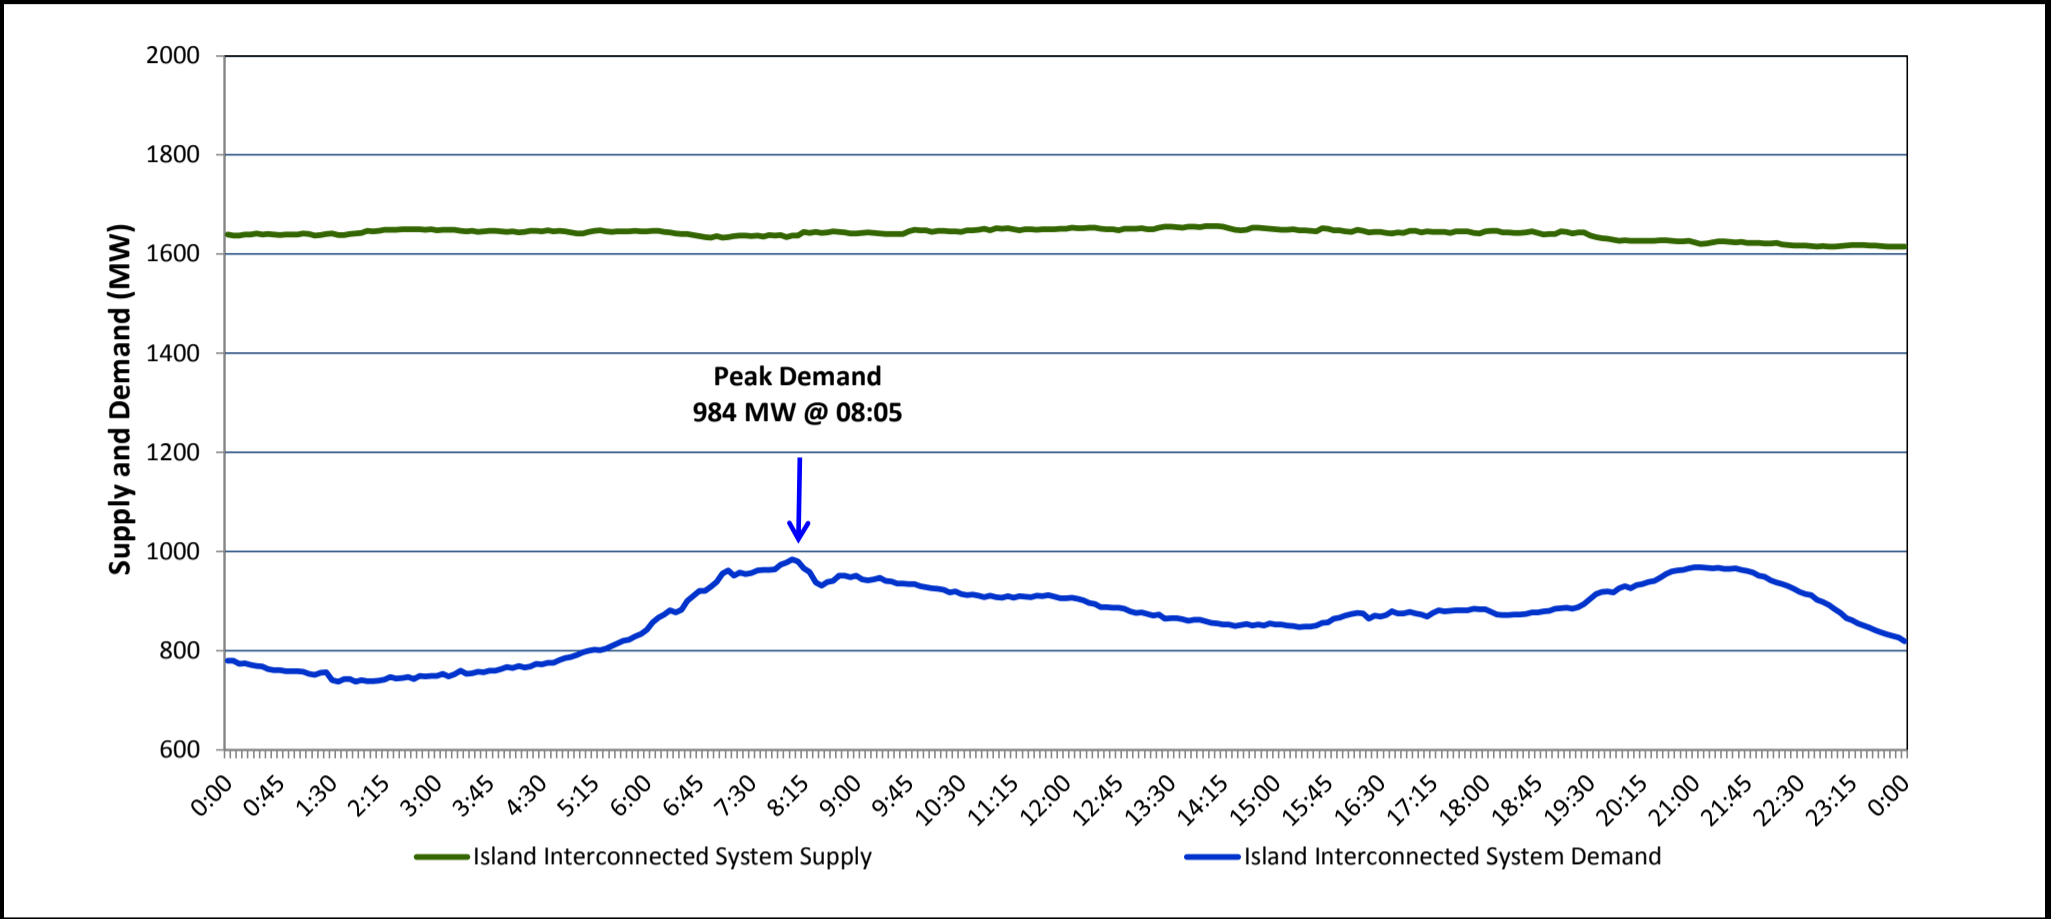

Supply Notes For May 06, 20151,2

A

As of 1823 hours, March 01, 2015, Hardwoods Gas Turbine End B unavailable (25 MW).

B

As of 1333 hours, April 10, 2015, Holyrood Unit 3 removed from service for annual maintenance (150 MW).

C

As of 0843 hours, April 26, 2015, Bay d'Espoir Unit 1 removed from service for annual maintenance (76.5 MW).

D

As of 0843 hours, April 26, 2015, Bay d'Espoir Unit 2 removed from service for maintenance (76.5 MW).

E

As of 1034 hours May 1, 2015, Stephenville Gas Turbine unavailable (50 MW).

F

As of 1702 hours May 1, Nalcor Exploits Bishop's Falls plant production near normal 11 MW (18 MW).

Section 2
Island Interconnected Supply and Demand

Thu, May 07, 2015 Island System Outlook ³			Temperature (°C)		Island System Daily Peak Demand (MW) Forecast
			Morning	Evening	
Available Island System Supply: ⁵	1,650	MW	Thursday, May 07, 2015		1,110
NLH Generation: ⁴	1,315	MW	Friday, May 08, 2015		1,240
NLH Power Purchases:	115	MW	Saturday, May 09, 2015		1,065
Other Island Generation:	220	MW	Sunday, May 10, 2015		1,090
Current St. John's Temperature:	1	°C	Monday, May 11, 2015		1,025
Current St. John's Windchill:	N/A	°C	Tuesday, May 12, 2015		1,035
7-Day Island Peak Demand Forecast:	1,240	MW	Wednesday, May 13, 2015		1,205

Supply Notes For May 07, 20153

Notes:

- Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
- Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as underfrequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Underfrequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
- As of 0800 Hours.
- Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
- Gross output from all Island sources (including Note 4).

Section 3
Island Peak Demand Information
Previous Day Actual Peak and Current Day Forecast Peak

Wed, May 06, 2015	Actual Island Peak Demand ⁷	08:05	984 MW
Thu, May 07, 2015	Forecast Island Peak Demand		1,110 MW

Notes: 7. Island Demand is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).