

## Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed Monday, October 19, 2015



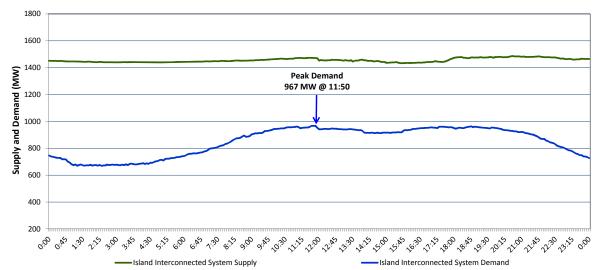

## Supply Notes For October 18, 2015

- A As of 0949 hours, August 01, 2015, Holyrood Unit 1 removed from service for annual maintenance (170 MW).
- B As of 1042 hours, August 31, 2015, Stephenville Gas Turbine unavailable. Previously derated to 30 MW (50 MW).
- As of 1605 hours, September 27, 2015, Bay d'Espoir Unit 4 unavailable (76.5 MW).
- As of 1527 hours, October 07, 2015, Holyrood Unit 3 removed from service for economic dispatch (150 MW).
- E As of 1608 hours, October 09, 2015, Hardwoods Gas Turbine available. Derated to 38 MW (50 MW). End A 20 MW, End B 19 MW.
- F As of 1610 hours, October 11, 2015, Bay d'Espoir Unit 3 unavailable (76.5 MW).
- At 1156 hours, October 18, 2015, Nalcor Exploits Unit 9 unavailable (30 MW). Net impact to Island System is 10 MW

Section 2 Island Interconnected Supply and Demand						
Mon, Oct 19, 2015 Island System Outlook <sup>3</sup>			Seven-Day Forecast	1 .	erature C)	Island System Daily Peak Demand (MW)
				Morning	Evening	Forecast
Available Island System Supply:5	1,480	MW	Monday, October 19, 2015	6	4	1,060
NLH Generation:⁴	1,160	MW	Tuesday, October 20, 2015	6	5	1,040
NLH Power Purchases:	115	MW	Wednesday, October 21, 2015	10	6	1,010
Other Island Generation:	205	MW	Thursday, October 22, 2015	4	4	1,030
Current St. John's Temperature:	5	°C	Friday, October 23, 2015	8	10	990
Current St. John's Windchill:	N/A	°C	Saturday, October 24, 2015	11	8	1,045
7-Day Island Peak Demand Fored	ast: <b>1,060</b>	MW	Sunday, October 25, 2015	6	5	965

## Supply Notes For October 19, 2015

- Notes: 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
  - 2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as underfrequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Underfrequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
  - As of 0800 Hours.
  - 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
  - Gross output from all Island sources (including Note 4).

## Section 3 Island Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak Sun, Oct 18, 2015 Actual Island Peak Demand 11:50 967 MW Mon, Oct 19, 2015 Forecast Island Peak Demand 1,060 MW

Notes: 7. Island Demand is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power,