
Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed Wednesday, March 22, 2017

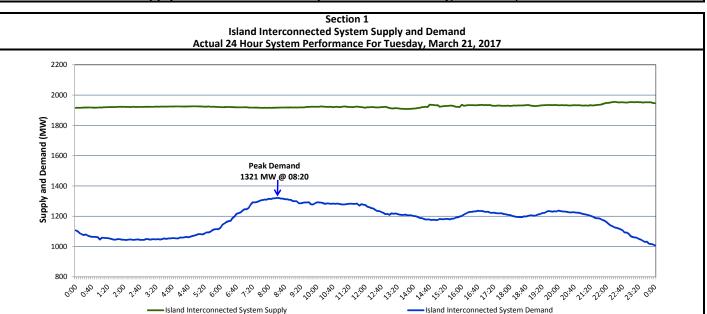

Supply Notes For March 21, 2017

As of 0928 hours, March 12, 2017, Stephenville Gas Turbine available at 25 MW (50 MW).

At 1440 hours, March 21, 2017, Holyrood Unit 3 available at full capacity (150 MW).

At 1600 hours, March 21, 2017, Holyrood Unit 1 available at 134 MW (170 MW).

At 1600 hours, March 21, 2017, Holyrood Unit 2 available at 134 MW (170 MW

Section 2 Island Interconnected Supply and Demand									
			Seven-Day Forecast		erature				
Wed, Mar 22, 2017 Island System Outlook ³		(°		C)	Island System Daily Peak Demand (MW)				
				Morning	Evening	Forecast	Adjusted ⁷		
Available Island System Supply:5	1,935	MW	Wednesday, March 22, 2017	-1	-2	1,335	1,228		
NLH Generation: ⁴	1,595	MW	Thursday, March 23, 2017	3	-3	1,375	1,268		
NLH Power Purchases: ⁶	125	MW	Friday, March 24, 2017	-9	-9	1,555	1,446		
Other Island Generation:	215	MW	Saturday, March 25, 2017	-5	-1	1,340	1,233		
Current St. John's Temperature:	-1	°C	Sunday, March 26, 2017	-11	-9	1,530	1,421		
Current St. John's Windchill:	-8	°C	Monday, March 27, 2017	-9	-2	1,580	1,471		
7-Day Island Peak Demand Foreca	st: 1,580	MW	Tuesday, March 28, 2017	-1	0	1,375	1,268		

Supply Notes For March 22, 2017

Notes:

- 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
- 2. Due to the Island Interconnected System being isolated from the larger North American grid, when there is a sudden loss of large generating units some customer's load must be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as under frequency load shedding, is necessary to ensure the integrity and reliability of system equipment. Under frequency events typically occur 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes.
- 3. As of 0800 Hours.
- 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
- 5. Gross output from all Island sources (including Note 4).
- 6. NLH Power Purchases include: CBPP Co-Gen, Nalcor Exploits, Rattle Brook, Star Lake, Vale capacity assistance (when applicable), and Wind Generation.
- 7. Adjusted for CBP&P, Praxair and Vale interruptible load as well as the impact of voltage reduction, when applicable.

Section 3 Island Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak						
Tue, Mar 21, 2017	Actual Island Peak Demand ⁸	08:20	1,321 MW			
Wed, Mar 22, 2017	Forecast Island Peak Demand		1,335 MW			

Notes: 8. Island Demand is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).