
## **Newfoundland Labrador Hydro (NLH)** Supply and Demand Status Report Filed Thursday, February 20, 2020

## Section 1 Island Interconnected System Supply, Demand & Exports Actual 24 Hour System Performance For Wednesday, February 19, 2020

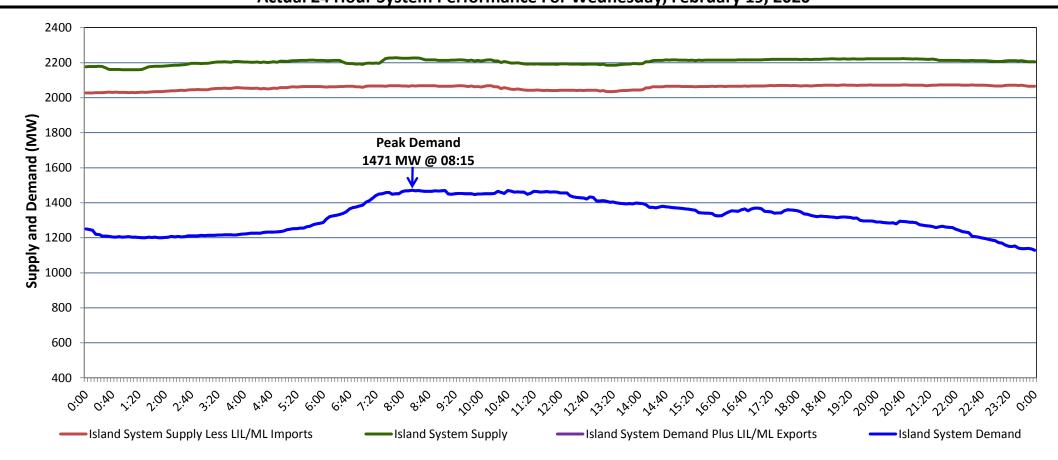

Supply Notes For February 19, 2020

At 1200 hours, February 19, 2020, Holyrood Diesels available at full capacity (10 MW).

## Section 2

Island Interconnected Supply and Demand

Thu, Feb 20, 2020	Island System Outlook <sup>3</sup>			Seven-Day Forecast	Temperature (°C)		Island System Daily Peak Demand (MW)	
					Morning	Evening	Forecast	<b>Adjusted</b> <sup>7</sup>
Available Island System Supply: <sup>5</sup>		2,095	MW	Thursday, February 20, 2020	-6	-10	1,605	1,498
NLH Island Generation:4		1,695	MW	Friday, February 21, 2020	-12	-10	1,645	1,538
NLH Island Power Purchases: <sup>6</sup>		145	MW	Saturday, February 22, 2020	-13	-8	1,495	1,390
Other Island Generation:		215	MW	Sunday, February 23, 2020	-4	-3	1,360	1,256
ML/LIL Imports:		40	MW	Monday, February 24, 2020	-3	-2	1,365	1,261
Current St. John's Temperature & Windchill:	-6 °C	-15	°C	Tuesday, February 25, 2020	-2	-1	1,335	1,232
7-Day Island Peak Demand Forecast:		1,645	MW	Wednesday, February 26, 2020	-2	1	1.325	1.222

Supply Notes For February 20, 2020

Notes:

- 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
- 2. Due to the Island system having no synchronous connections to the larger North American grid, when there is a sudden loss of large generating units there may be a requirement for some customer's load to be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as under frequency load shedding (UFLS), is necessary to ensure the integrity and reliability of system equipment. Under frequency events have typically occurred 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes. With the activation of the Maritime Link frequency controller during the winter of 2018, UFLS events have occurred less frequently.
- As of 0800 Hours.
- 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
- 5. Gross output from all Island sources (including Note 4).
- 6. NLH Island Power Purchases include: CBPP Co-Gen, Nalcor Exploits, Rattle Brook, Star Lake, Wind Generation and capacity assistance (when applicable).
- 7. Adjusted for curtailable load, market activities and the impact of voltage reduction when applicable.

## **Section 3 Island Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak** Wed, Feb 19, 2020 08:15 1,471 MW Actual Island Peak Demand<sup>8</sup> Thu, Feb 20, 2020 Forecast Island Peak Demand 1,605 MW

Notes: 8. Island Demand / LIL / ML Exports (where applicable) is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).