


Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed Tuesday, June 23, 2020

Section 1 Island Interconnected System Supply, Demand & Exports Actual 24 Hour System Performance For Saturday, June 20, 2020

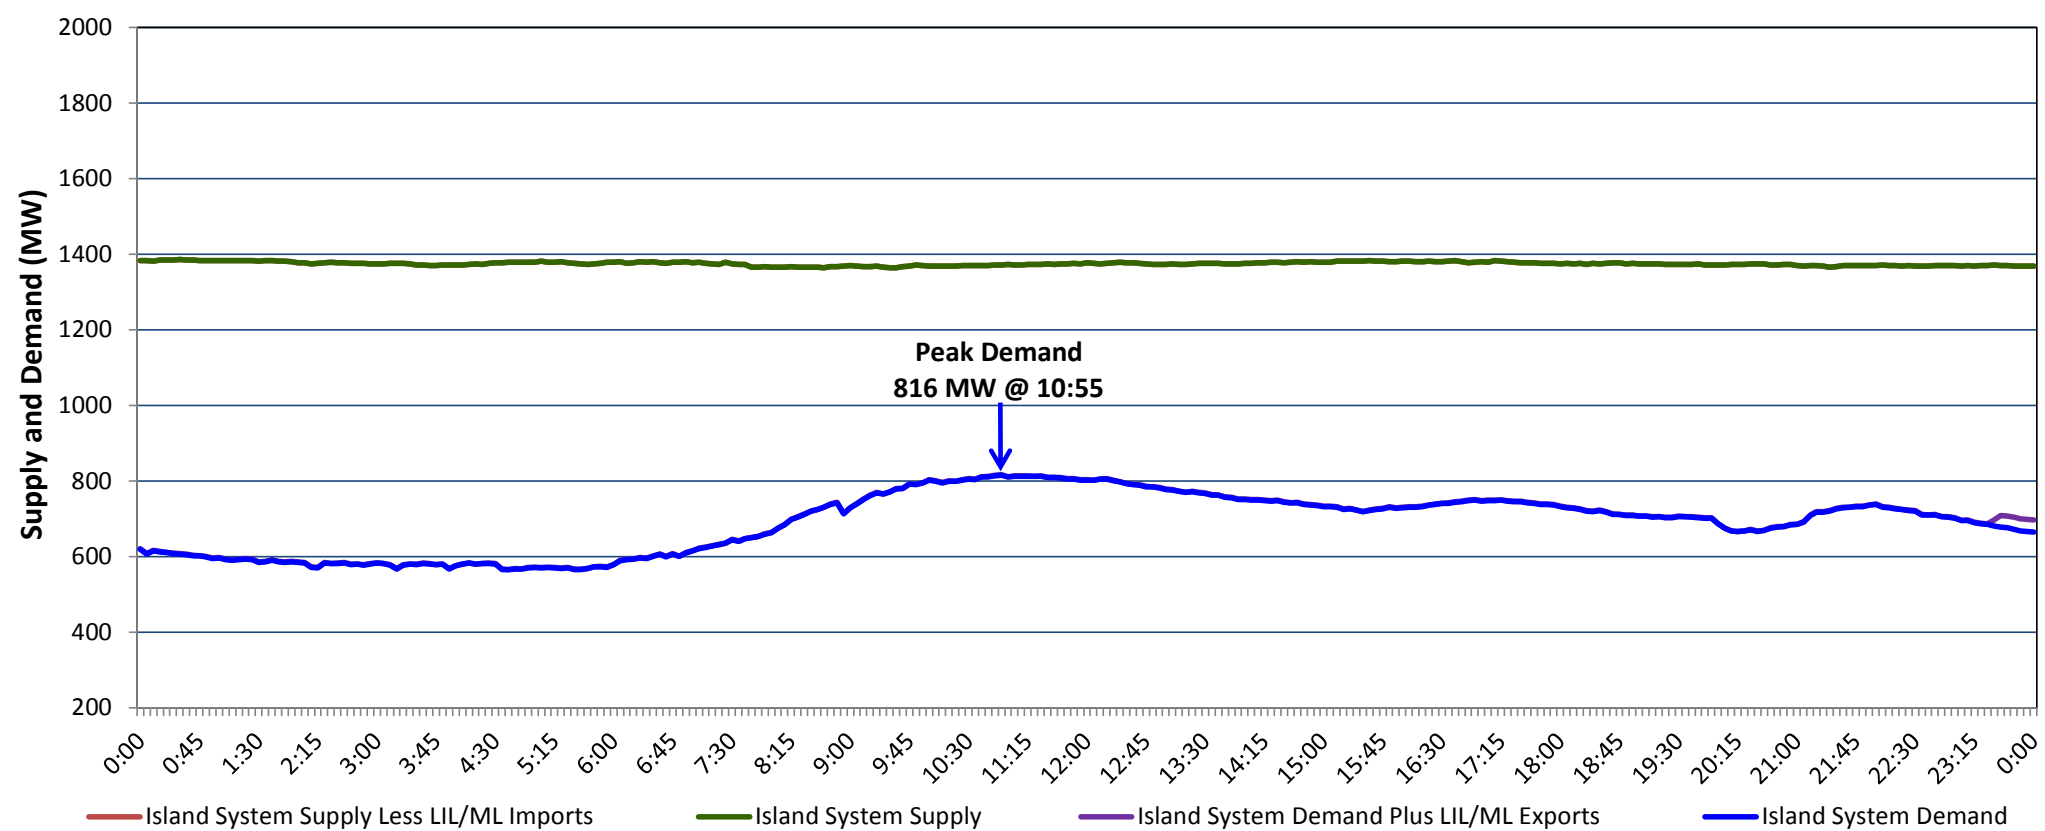

Supply Notes For June 20, 2020

1,2

- A As of 1245 hours, April 24, 2020, Holyrood Unit 3 unavailable due to planned outage (150 MW).
- B As of 1000 hours, May 31, 2020, Bay d'Espoir Unit 1 unavailable due to planned outage (76.5 MW).
- C As of 1415 hours, June 11, 2020, Holyrood Unit 1 unavailable due to planned outage (170 MW).
- D As of 1913 hours, June 13, 2020, Holyrood Unit 2 available but not operating (170 MW).
- E As of 0801 hours, June 19, 2020, Bay d'Espoir Unit 2 unavailable due to planned outage (76.5 MW).

Section 2 Island Interconnected Supply and Demand

Sun, Jun 21, 2020	Island System Outlook ³		Seven-Day Forecast	Temperature (°C)		Island System Daily Peak Demand (MW)	
				Morning	Evening	Forecast	Adjusted ⁷
Available Island System Supply: ⁵	1,355	MW	Sunday, June 21, 2020	7	10	780	780
NLH Island Generation: ⁴	1,050	MW	Monday, June 22, 2020	10	15	795	795
NLH Island Power Purchases: ⁶	90	MW	Tuesday, June 23, 2020	18	19	750	750
Other Island Generation:	215	MW	Wednesday, June 24, 2020	19	20	755	755
ML/LIL Imports:	-	MW	Thursday, June 25, 2020	18	19	745	745
Current St. John's Temperature & Windchill:	7 °C	N/A °C	Friday, June 26, 2020	18	19	750	750
7-Day Island Peak Demand Forecast:	795	MW	Saturday, June 27, 2020	15	10	750	750

Supply Notes For June 21, 2020

3

- Notes:
1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
 2. Due to the Island system having no synchronous connections to the larger North American grid, when there is a sudden loss of large generating units there may be a requirement for some customer's load to be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as under frequency load shedding (UFLS), is necessary to ensure the integrity and reliability of system equipment. Under frequency events have typically occurred 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes. With the activation of the Maritime Link frequency controller during the winter of 2018, UFLS events have occurred less frequently.
 3. As of 0800 Hours.
 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
 5. Gross output from all Island sources (including Note 4).
 6. NLH Island Power Purchases include: CBPP Co-Gen, Nalcor Exploits, Rattle Brook, Star Lake, Wind Generation and capacity assistance (when applicable).
 7. Adjusted for curtailable load, market activities and the impact of voltage reduction when applicable.

Section 3 Island Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak

Sat, Jun 20, 2020	Actual Island Peak Demand ⁸	10:55	816 MW
Sun, Jun 21, 2020	Forecast Island Peak Demand		780 MW

Notes: 8. Island Demand / LIL / ML Exports (where applicable) is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).