


**Newfoundland Labrador Hydro (NLH)
Supply and Demand Status Report Filed Tuesday, June 23, 2020**

**Section 1
Island Interconnected System Supply, Demand & Exports
Actual 24 Hour System Performance For Monday, June 22, 2020**

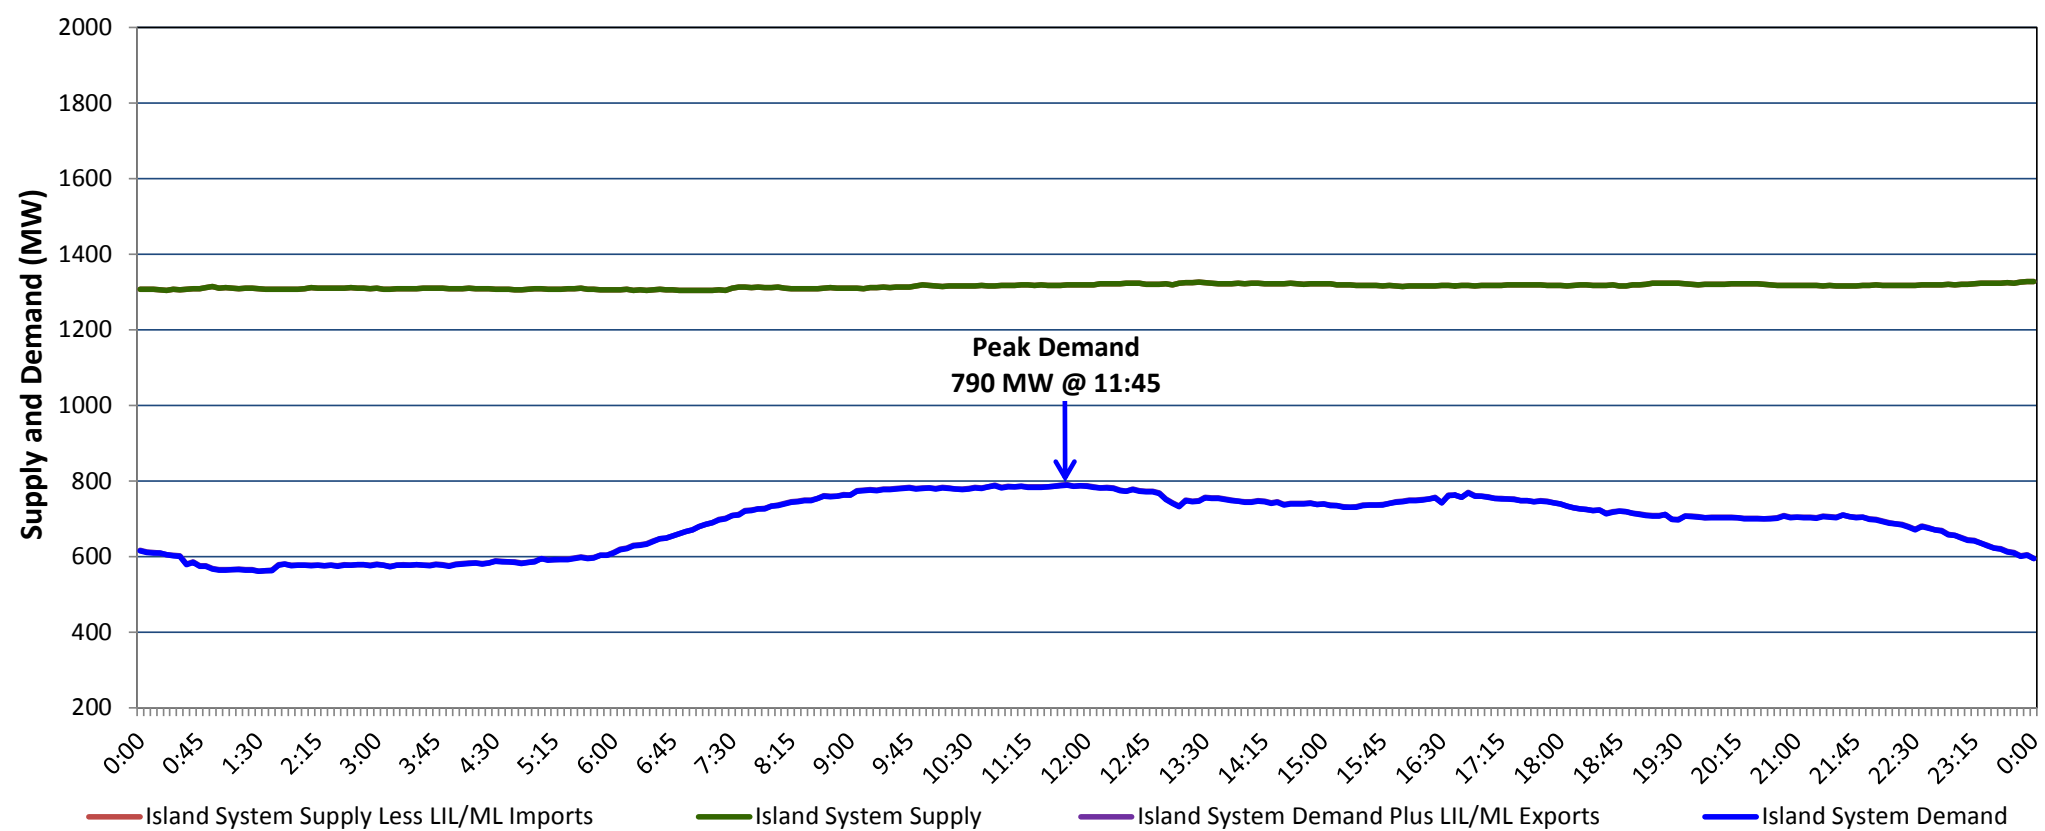

Supply Notes For June 22, 2020

1,2

- A As of 1000 hours, May 31, 2020, Bay d'Espoir Unit 1 unavailable due to planned outage (76.5 MW).
- B As of 1415 hours, June 11, 2020, Holyrood Unit 1 unavailable due to planned outage (170 MW).
- C As of 1913 hours, June 13, 2020, Holyrood Unit 2 available but not operating (170 MW).
- D As of 0801 hours, June 19, 2020, Bay d'Espoir Unit 2 unavailable due to planned outage (76.5 MW).
- E As of 0853 hours, June 21, 2020, Holyrood Unit 3 available but not operating (150 MW).

**Section 2
Island Interconnected Supply and Demand**

Tue, Jun 23, 2020	Island System Outlook ³	Seven-Day Forecast	Temperature (°C)		Island System Daily Peak Demand (MW)	
			Morning	Evening	Forecast	Adjusted ⁷
Available Island System Supply: ⁵	1,375 MW	Tuesday, June 23, 2020	18	19	770	770
NLH Island Generation: ⁴	1,050 MW	Wednesday, June 24, 2020	18	20	750	750
NLH Island Power Purchases: ⁶	105 MW	Thursday, June 25, 2020	19	20	755	755
Other Island Generation:	220 MW	Friday, June 26, 2020	20	19	740	740
ML/LIL Imports:	- MW	Saturday, June 27, 2020	16	14	725	725
Current St. John's Temperature & Windchill: 17 °C	N/A °C	Sunday, June 28, 2020	11	10	785	785
7-Day Island Peak Demand Forecast:	835 MW	Monday, June 29, 2020	8	7	835	785

Supply Notes For June 23, 2020

3

- Notes:
1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
 2. Due to the Island system having no synchronous connections to the larger North American grid, when there is a sudden loss of large generating units there may be a requirement for some customer's load to be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as under frequency load shedding (UFLS), is necessary to ensure the integrity and reliability of system equipment. Under frequency events have typically occurred 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes. With the activation of the Maritime Link frequency controller during the winter of 2018, UFLS events have occurred less frequently.
 3. As of 0800 Hours.
 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
 5. Gross output from all Island sources (including Note 4).
 6. NLH Island Power Purchases include: CBPP Co-Gen, Nalcor Exploits, Rattle Brook, Star Lake, Wind Generation and capacity assistance (when applicable).
 7. Adjusted for curtailable load, market activities and the impact of voltage reduction when applicable.

**Section 3
Island Peak Demand Information
Previous Day Actual Peak and Current Day Forecast Peak**

Mon, Jun 22, 2020	Actual Island Peak Demand ⁸	11:45	790 MW
Tue, Jun 23, 2020	Forecast Island Peak Demand		770 MW

- Notes: 8. Island Demand / LIL / ML Exports (where applicable) is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).