
Newfoundland Labrador Hydro (NLH) Supply and Demand Status Report Filed Tuesday, August 04, 2020

Section 1 Island Interconnected System Supply, Demand & Exports Actual 24 Hour System Performance For Friday, July 31, 2020

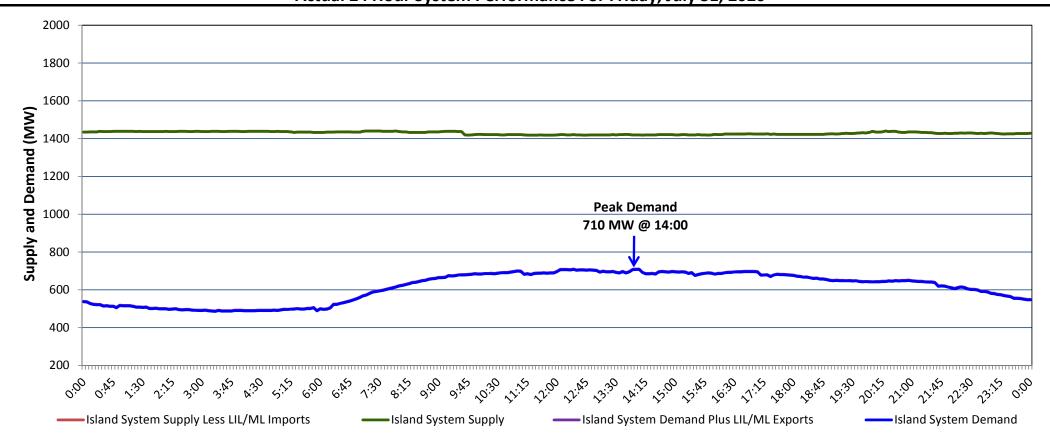

Supply Notes For July 31, 2020

1,2

- As of 1415 hours, June 11, 2020, Holyrood Unit 1 unavailable due to planned outage (170 MW).
- B As of 0853 hours, June 21, 2020, Holyrood Unit 3 available but not operating (150 MW).
 - As of 0808 hours, July 15, 2020, Holyrood Unit 2 unavailable due to planned outage (170 MW).
- D As of 1222 hours, July 26, 2020, Cat Arm Unit 2 unavailable due to planned outage (67 MW).
 - At 1600 hours, July 31, 2020, St. Anthony Diesel Plant available at full capacity (9.7 MW).

Section 2

Island Interconnected Supply and Demand

Sat, Aug 01, 2020	Island System Outlook ³		Seven-Day Forecast	<u>-</u>	Temperature (°C)		Island System Daily Peak Demand (MW)	
				Morning	Evening	Forecast	Adjusted ⁷	
Available Island System Supply: ⁵	1,420	MW	Saturday, August 01, 2020	16	15	725	725	
NLH Island Generation: ⁴	1,135	MW	Sunday, August 02, 2020	14	16	710	710	
NLH Island Power Purchases: ⁶	85	MW	Monday, August 03, 2020	19	20	660	660	
Other Island Generation:	200	MW	Tuesday, August 04, 2020	19	20	655	655	
ML/LIL Imports:	-	MW	Wednesday, August 05, 2020	15	18	645	645	
Current St. John's Temperature & Windchill:	14 °C N/A	°C	Thursday, August 06, 2020	18	19	645	645	
7-Day Island Peak Demand Forecast:	725	MW	Friday, August 07, 2020	20	19	660	660	

Supply Notes For August 01, 2020

Notes:

- 1. Generation outages for running and corrective maintenance are included. These are not unusual for power system operations. They generally do not impact customer supply. The power system operators schedule outages to system equipment whenever possible to coincide with periods when customer demands are low and sufficient supply reserves are available. However, from time to time equipment outages are necessary and reserves may be impacted.
- 2. Due to the Island system having no synchronous connections to the larger North American grid, when there is a sudden loss of large generating units there may be a requirement for some customer's load to be interrupted for short periods to bring generation output equal to customer demand. This automatic action of power system protection, referred to as under frequency load shedding (UFLS), is necessary to ensure the integrity and reliability of system equipment. Under frequency events have typically occurred 5 to 8 times per year on the Island Interconnected System and the resultant customer load interruptions are generally less than 30 minutes. With the activation of the Maritime Link frequency controller during the winter of 2018, UFLS events have occurred less frequently.
- 3. As of 0800 Hours.
- 4. Gross output including station service at Holyrood (24.5 MW) and improved NLH hydraulic output due to water levels (35 MW).
- 5. Gross output from all Island sources (including Note 4).
- 6. NLH Island Power Purchases include: CBPP Co-Gen, Nalcor Exploits, Rattle Brook, Star Lake, Wind Generation and capacity assistance (when applicable).
- 7. Adjusted for curtailable load, market activities and the impact of voltage reduction when applicable.

Section 3 Island Peak Demand Information Previous Day Actual Peak and Current Day Forecast Peak Fri, Jul 31, 2020 Actual Island Peak Demand Actual Island Peak Demand Forecast Island Peak Demand 725 MW

Notes: 8. Island Demand / LIL / ML Exports (where applicable) is supplied by NLH generation and purchases, plus generation owned and operated by Newfoundland Power and Corner Brook Pulp & Paper (Deer Lake Power, DLP).